

DIMENSIONS (mm)

Width: 1187/1274/1741/2061

Depth: 1270/1319 Height: 970/1000

Width of passage: 530/600/765/900

Glass height: 915/920/1700

CONSTRUCTION

Standard finish in stainless steel, other options are available

FLOW RATE

16 people per min / 3.75 sec per cycle

Did you know?

Most suppliers quote a machine value flow rate as opposed to a practical one. We provide honest and achievable flow rates.

DATASHEET

SPEED LANES

Safetell's Speed Lanes provide a sleek entrance control and anti-tailgating solution to a building or secure area. Typical applications include airports, authorised personnel entry points, government buildings, corporate buildings, museums, theatres, arenas, stadiums, leisure centres and gyms.

MAIN FEATURES

- Easy setup easy configuration of operation modes and functions via the touch panel
- LED pictograms shows active/ inactive traffic directions in the passage, the red arrow shows the inactive/blocked traffic direction and the green arrow shows the active/ unblocked traffic direction
- Sound signalling an alarm sounds in unusual situations e.g. two people trying to pass through, unauthorised access or an unauthorised object in the movement detection area
- Emergency exit the gate remains open in case of a power failure
- Overload protection all gates have additional overload protection systems to stop the wings and sound the alarm if an obstacle is detected
- Sensor array system software analyses sensor signals to detect two people trying to pass through at once, or a person passing without authorisation

OPTIONAL


- · Available in different sizes and styles
- Glazing colour options include clear, dark grey, dark blue, bronze
- Finish options include Inox, Galvanised, Galvanised + RAL, RAL 5010, RAL 9003, RAL 7016



SERVICE &
MAINTENANCE
AVAILABLE

+44 (0) 1322 223 233

TECHNICAL DRAWINGS

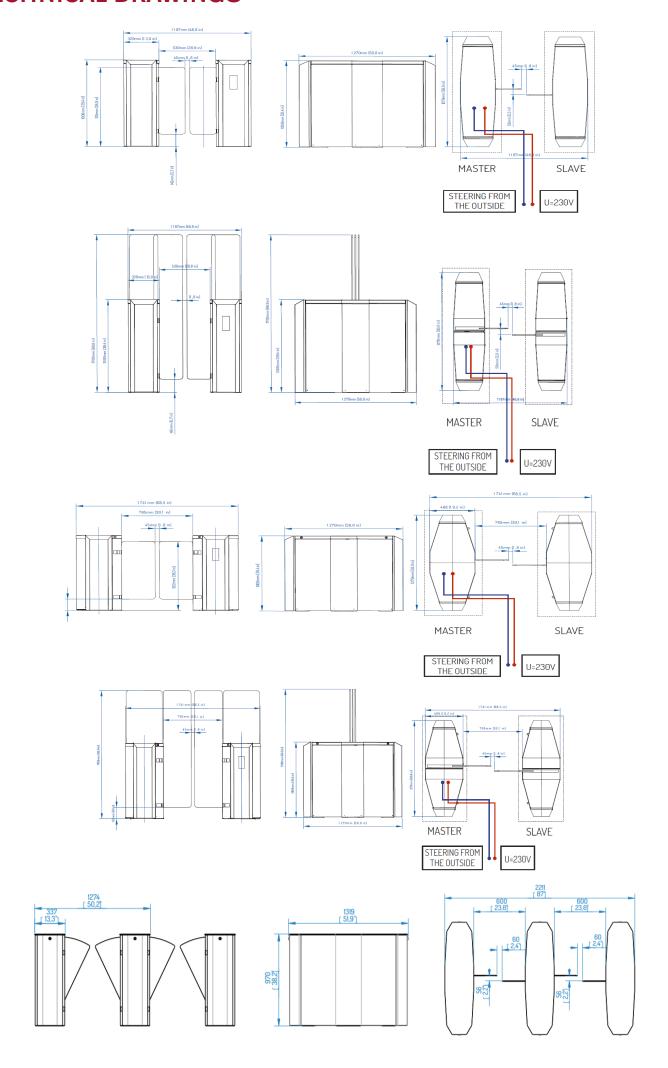

FINISHES











INOX





















WE ARE FULLY ACCREDITED











